

Locking: Casement Latch  
Operation: Rotary Handle Operator  
Hinges: Welded

Climate Proofing:  
Integral Thermal Break  
Dual Thermal Seals  
Dual Air Seals

Glazing:  
Dual/Triple pane Krypton Gas Filled  
Integral Noise Control Included  
Low E Options Available  
Fully Tempered  
Spacer, Black  
Factory Installed Wet Glazing w Steel Stop  
1/2" and 1" Muntins Available - FDL


Frame:  
Depth: 68 mm  
Attachment: Nail Fin (optional)

Finish:  
Thermally Bonded Zinc Galvanized  
2 Coats Epoxy Primer  
3 Coats Acrylic Lacquer  
3 Coats Clear Polyurethane

\* MUNTINS ARE OPTIONAL





FRONT VIEW FROM OUTSIDE

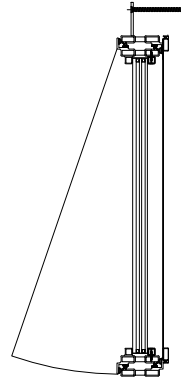


VERTICAL SECTION



HORIZONTAL SECTION

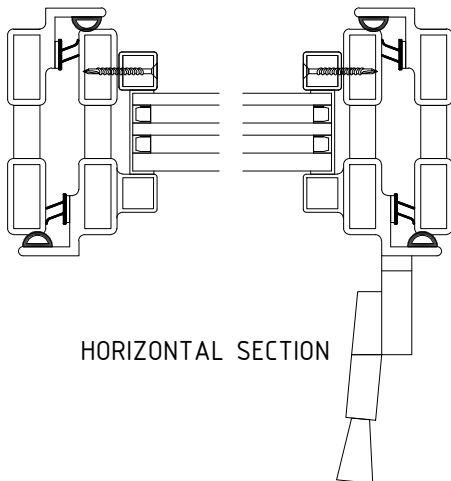

HORIZONTAL SECTION

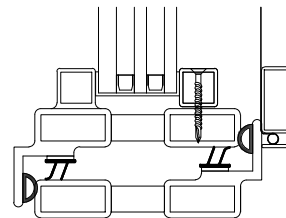

VERTICAL SECTION