EuroLite
Steel Doors & Windows

ET68-AC-XO
ET68 EXTERIOR AWNING WINDOW COMBO

Locking: Casement Latch
Operation: Rotary Handle Operator
Hinges: Welded

Glazing:
Dual/Triple pane Krypton Gas Filled
Integral Noise Control Included
Low E Options Available
Fully Tempered
Spacer, Black
Factory Installed Wet Glazing w Steel Stop
1/2" and 1" Muntins Available - FDL

Climate Proofing:
Integral Thermal Break
Dual Thermal Seals
Dual Air Seals

Frame:
Depth: 68 mm
Attachment: Nail Fin (optional)

Finish:
Thermally Bonded Zinc Galvanized
2 Coats Epoxy Primer
3 Coats Acrylic Lacquer
3 Coats Clear Polyurethane

* MUNTINS ARE OPTIONAL

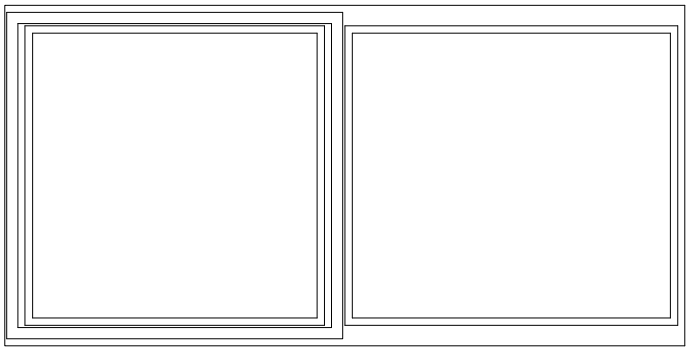

FRONT VIEW FROM OUTSIDE

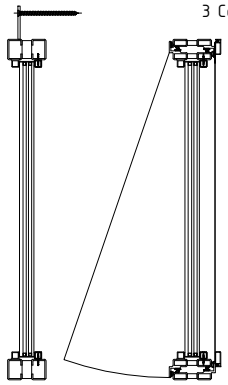

VERTICAL SECTION



HORIZONTAL SECTION





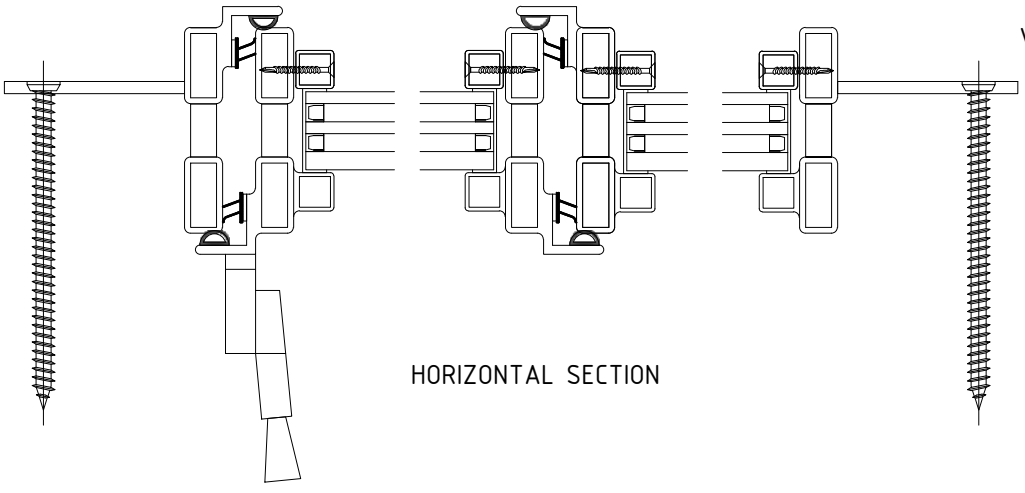

VERTICAL SECTION

HORIZONTAL SECTION

Contact:888-300-9631 www.eurolitedoors.com